

VersaMax Nano and Micro Controllers

Don't let size fool you. Although they are easy on valuable panel space, the VersaMax Nano and Micro PLCs are big on features. For high-volume applications where cost and fast processor speeds are an issue, the VersaMax Nano is the PLC of choice. For additional functionality, the modular VersaMax Micro offers the features and the flexibility to match application needs in such industries as food processing, chemicals, packaging, water and wastewater, construction equipment and plastics.

For tight spaces, the VersaMax Nano PLC is the perfect solution. Thanks to its all-in-one construction, installation is a breeze. All you have to do is snap it onto a DIN-rail or screw it into a panel. With the VersaMax Nano, you save on initial as well as life cycle costs.

The small-footprint VersaMax Micro PLC offers the flexibility of modular design and a variety of built-in features, including up to 64 I/O points (expandable to 170 I/O points), fast cycle times, a robust instruction set and extensive memory that multiplies your programming options.

Machine Edition

Machine Edition is an advanced software environment for the development and maintenance of machine level automation. Visualization, motion control, and execution logic are developed with a single programmer.

Publication Reference Chart

GFK-1645	VersaMax Micro PLCs and Nano PLCs User's Manual
IC690CDU002	InfoLink for PLC CD-ROM



Nano PLCs, page 9.5



Micro PLCs, pages 9.6-9.13



Expansion Units, pages 9.14-9.24



DataPanel Operator Interfaces, page 9.25



Communications Options, pages 9.26-9.27



Portable Program Download Device (PPDD), pages 9.28-9.29

Accessories, pages 9.30-9.31

Configuration Guidelines, pages 9.32-9.33

VersaMax Nano and Micro Selection Guide

Features	Nano 10	Micro 14	Micro 23	Micro 28	Micro 20	Micro 40	Micro 64
Built-in Discrete I/O	6 in/ 4out	8 in/ 6 out	13 in/10 out	16 in/12 out	12 in/8 out	24 in/16 out	40 in/24 out
Built-in Analog I/O	1 on some models	none	2 in/ 1 out	none	none	none	none
I/O Expansion Units	none	Up to 4 units	Up to 4 units	Up to 4 units	Up to 4 units	Up to 4 units	Up to 4 units
Logic Memory (Words)	2K	9K	9K	9K	24K	24K	24K
Data Storage (Words)	256	256	2K	2K	32K	32K	32K
Scan Time (msec/K)	1.3 msec	1.1 msec	1.1 msec	1.1 msec	1.1 msec	1.1 msec	1.1 msec
Battery Backed RAM	Super Cap only	Super Cap only	Yes and Super Cap	Yes and Super Cap	Yes and Super Cap	Yes and Super Cap	Yes and Super Cap
Real Time Clock	none	none	Yes, Included	Yes, Included	Yes, Included	Yes, Included	Yes, Included
Ports Available	1 RS-232	1 RS-232	1 RS-232 and 1 RS-485	1 RS-232 and 1 RS-485	1 RS-232 and second port optional RS-232, RS-485, USB or Ethernet	1 RS-232 and second port optional RS-232, RS-485, USB or Ethernet	1 RS-232 and second port optional RS-232, RS-485, USB or Ethernet
Ethernet Option	Yes, VersaMax SE	Yes, VersaMax SE	Yes, VersaMax SE	Yes, VersaMax SE	Yes on second port	Yes on second port	Yes on second port
High Speed Counter	Up to 4 at 10Khz (16 bit)	Up to 4 at 10Khz (16 bit)	Up to 4 at 10Khz (16 bit)	Up to 4 at 10Khz (16 bit)	Up to 4 at 100Khz (32 bit)	Up to 4 at 100Khz (32 bit)	Up to 4 at 100Khz (32 bit)
Pulse Train/PWM	Up to 4 at 5Khz (16 bit)	Up to 4 at 5Khz (16 bit)	Up to 4 at 5Khz (16 bit)	Up to 4 at 5Khz (16 bit)	Up to 4 at 65Khz (32 bit)	Up to 4 at 65Khz (32 bit)	Up to 4 at 65Khz (32 bit)
Motion Commands	N/A	N/A	N/A	N/A	Find Home, Go Home, Jog, Ramp, Blended Move (4 Consecutive Moves)	Find Home, Go Home, Jog, Ramp, Blended Move (4 Consecutive Moves)	Find Home, Go Home, Jog, Ramp, Blended Move (4 Consecutive Moves)
Write Register Values to Internal Flash	No	Yes	Yes	Yes	Yes	Yes	Yes
On Line Program Support	No	No	No	No	Yes with Firmware 3.9 & Hardware revision B	Yes with Firmware 3.9	Yes with Firmware 3.9

Powerful Instruction Set

Bit Operation Functions

- Logic AND, Logic OR
- Exclusive OR, Logical Invert
- Shift Right/Left
- Rotate Right/Left
- Bit Test/Set/Clear
- Masked Compare
- Bit Position
- Bit Sequencer

Control Functions

- Do I/O
- Call
- End
- Subroutines
- Comments
- Master Control Relay
- Service Request
- PID

Table Functions

- Array Move
- Search

Data Move Functions

- Move
- Block Move
- Block Clear
- Shift Register
- Communications Request
 - Motion Moves
 - High Speed Counter
 - Serial Read/Write
 - Modbus Master

Conversion Functions

- BCD- 4
- Signed Integer
- Double Precision Signed Integer
- Real
- Real to Word
- Truncate Real Number

Math and Numerical Functions

- +, -, x, /
- Modulo division
- Scaling
- Square Root
- Trigonometric Functions
- Logarithmic/Exponential
- Convert Radians

Relation Functions

- Equal
- Not Equal
- Greater Than
- Less Than
- Greater or Equal
- Less or Equal
- Range

Relay Functions

- Contacts, Coils
- Fault and No Fault Contacts
- Alarm Contacts

Timer and Counters

- Time-tick Contacts
- On-delay Stopwatch timer
- On-delay timer
- Off-delay timer
- Up Counter
- Down Counter

Nano 10 PLCs



The palm-sized VersaMax Nano PLC is highly compact, with an all-in-one construction that saves panel space. Installation is a breeze: simply snap it onto a DIN-rail or mount it on a panel. Because it gives you more capabilities in a smaller, less expensive package, the Nano PLC is ideal for high-volume applications that require low cost, compact size, and fast processor speeds. The Nano decreases your life-cycle costs as well, with easy installation and long-term reliability.

	IC200NAL110	IC200NAL211	IC200NDD010	IC200NDD101	IC200NDR001	IC200NDR010
Product Name	10 point (6) 12 VDC In, (1) Analog Voltage In, (4) Relay Out, 12 VDC Powered	10 point (6) 24 VDC In, (1) Analog Voltage In, (4) Relay Out, 24 VDC Powered	10 point (6) 12 VDC In, (4) 12 VDC Out, 12 VDC Powered	10 point (6) 24 VDC In, (4) 24 VDC Out, 24 VDC Powered	10 point (6) 24 VDC In, (4) Relay Out, 24 VDC Powered	10 point (6) 12 VDC In, (4) Relay Out, 12 VDC Powered
Lifecycle Status	Mature	Mature	Mature	Mature	Mature	Mature
Number of Discrete Inputs/Outputs	6 In / 4 Out (Non Expandable)	6 In / 4 Out (Non Expandable)	6 In / 4 Out (Non Expandable)	6 In / 4 Out (Non Expandable)	6 In / 4 Out (Non Expandable)	6 In / 4 Out (Non Expandable)
Number of Analog Inputs/Outputs	1 In	1 In	N/A	N/A	N/A	N/A
Physical I/O Maximum	10	10	10	10	10	10
User Program Logic Memory (Words)	2 K	2 K	2 K	2 K	2 K	2 K
Registers (Words)	256	256	256	256	256	256
Analog Pots for Data Adjustment	Yes, 2	Yes, 2	Yes, 2	Yes, 2	Yes, 2	Yes, 2
Serial Port Connector Type	RJ-45 (RS-232)	RJ-45 (RS-232)	RJ-45 (RS-232)	RJ-45 (RS-232)	RJ-45 (RS-232)	RJ-45 (RS-232)
Protocols	SNP, SNP X (Breakless) RTU Slave (2 and 4 wire RTU Slave). Serial Read and Write	SNP, SNP X (Breakless) RTU Slave (2 and 4 wire RTU Slave). Serial Read and Write	SNP, SNP X (Breakless) RTU Slave (2 and 4 wire RTU Slave). Serial Read and Write	SNP, SNP X (Breakless) RTU Slave (2 and 4 wire RTU Slave). Serial Read and Write	SNP, SNP X (Breakless) RTU Slave (2 and 4 wire RTU Slave). Serial Read and Write	SNP, SNP X (Breakless) RTU Slave (2 and 4 wire RTU Slave). Serial Read and Write
Power Voltage	12 VDC	24 VDC	12 VDC	24 VDC	24 VDC	12 VDC
Input Power Supply Rating	3 watts internal	3 watts internal	3 watts internal	3 watts internal	3 watts internal	3 watts internal
Input Device Voltage	12 VDC	24 VDC	12 VDC	24 VDC	24 VDC	12 VDC
Maximum Type A and B Counters	2 Type A and 1 Type B @ 10Khz (16 bit)	2 Type A and 1 Type B @ 10Khz (16 bit)	2 Type A and 1 Type B @ 10Khz (16 bit)	2 Type A and 1 Type B @ 10Khz (16 bit)	2 Type A and 1 Type B @ 10Khz (16 bit)	2 Type A and 1 Type B @ 10Khz (16 bit)
Analog Input Ranges	0 to 10 VDC (8 bit)	0 to 10 VDC (8 bit)	N/A	N/A	N/A	N/A
Output Control Voltage	Relay Out	Relay Out	12 VDC	24 VDC	Relay Out	Relay Out
Relay Maximum Resistive Load Rating	2 Amps at 5 VDC and 240 VAC	2 Amps at 5 VDC and 240 VAC	N/A	N/A	2 Amps at 5 VDC and 240 VAC	2 Amps at 5 VDC and 240 VAC
Maximum Number of PWM/Pulse Outputs	0	0	3 @ 5Khz (16 bit)	3 @ 5Khz (16 bit)	0	0
Dimensions (W x H x D) mm	75 x 80 x 47	75 x 80 x 47	75 x 80 x 47	75 x 80 x 47	75 x 80 x 47	75 x 80 x 47
Operating Temperature	0°C to +55°C	0°C to +55°C	0°C to +55°C	0°C to +55°C	0°C to +55°C	0°C to +55°C
Programming Software	VersaPro 2.0 or greater, Machine Edition Logic Developer	VersaPro 2.0 or greater, Machine Edition Logic Developer	VersaPro 1.1 or greater, Machine Edition Logic Developer	VersaPro 1.1 or greater, Machine Edition Logic Developer	VersaPro 1.1 or greater, Machine Edition Logic Developer	VersaPro 1.1 or greater, Machine Edition Logic Developer
Portable Memory Module Support	No	No	No	No	No	No



Micro 14 PLCs

The Micro 14 PLC is big on features; from up to 14 I/O built-in (expandable to 126 I/O) points to fast cycle times, robust instruction set, and generous memory to allow more flexible programming. And it's all packaged in a sturdy modular design for easy access and long-term durability. This all-in-one PLC gives you everything you need to control a wide variety of applications.

	IC200UAA003	IC200UAR014	IC200UDD104	IC200UDD112
Product Name	14 point (8) 120 VAC In, (6) 120 VAC Out, 120/240 VAC Powered	14 point, (8) 120 VAC In, (6) Relay Out, 120/240 VAC Powered	14 point (8) 24 VDC In, (6) 12/24 VDC Out, (2) @ 1.0 A, (4) @ 0.5 A, 24 VDC Powered	14 point (8) 12 VDC In, (6) 12 VDC Out, 0.7 A, 12 VDC Powered
Lifecycle Status	Active	Active	Active	Active
Number of Discrete Inputs/Outputs	8 In / 6 Out (Supports 4 Expansion Units)	8 In / 6 Out (Supports 4 Expansion Units)	8 In / 6 Out (Supports 4 Expansion Units)	8 In / 6 Out (Supports 4 Expansion Units)
Number of Analog Inputs/Outputs	Supports up to 4 analog expansion units (16 analog in/ 8 analog out)	Supports up to 4 analog expansion units (16 analog in/ 8 analog out)	Supports up to 4 analog expansion units (16 analog in/ 8 analog out)	Supports up to 4 analog expansion units (16 analog in/ 8 analog out)
Physical I/O Maximum	126	126	126	126
User Program Logic Memory (Words)	9 K	9 K	9 K	9 K
Registers (Words)	256	256	256	256
Analog Pots for Data Adjustment	Yes, 2	Yes, 2	Yes, 2	Yes, 2
Serial Port Connector Type	RJ-45 (RS-232)	RJ-45 (RS-232)	RJ-45 (RS-232)	RJ-45 (RS-232)
Protocols	SNP, SNP X (Breakless) RTU Slave (2 and 4 wire RTU Slave). Serial Read and Write	SNP, SNP X (Breakless) RTU Slave (2 and 4 wire RTU Slave). Serial Read and Write	SNP, SNP X (Breakless) RTU Slave (2 and 4 wire RTU Slave). Serial Read and Write	SNP, SNP X (Breakless) RTU Slave (2 and 4 wire RTU Slave). Serial Read and Write
Power Voltage	120/240 VAC	120/240 VAC	24 VDC	12 VDC
Input Power Supply Rating	11 VA	11 VA	4 Watts	3 Watts
24 VDC User Power for Sensors	N/A	200 mA	200 mA	200 mA
Input Device Voltage	120 VAC	120 VAC	24 VDC	12 VDC
Maximum Type A and B Counters	N/A	N/A	4 Type A and 1 Type B @ 10Khz (16 bit)	4 Type A and 1 Type B @ 10Khz (16 bit)
Output Control Voltage	120 VAC	N/A	24 VDC	12 VDC
Relay Maximum Resistive Load Rating	N/A	6 @ 2 Amps at 24 VDC and 240 VAC; 2 @10 Amps at 24 VDC and 240 VAC	N/A	N/A
Maximum Number of PWM/Pulse Outputs	N/A	N/A	4 @ 5Khz (16 bit)	4 @ 5Khz (16 bit)
Dimensions (W x H x D) mm	95 x 90 x 76	95 x 90 x 76	95 x 90 x 76	95 x 90 x 76
Programming Software	VersaPro 1.1 or greater, Machine Edition Logic Developer	VersaPro 1.1 or greater, Machine Edition Logic Developer	VersaPro 1.1 or greater, Machine Edition Logic Developer	VersaPro 1.1 or greater, Machine Edition Logic Developer
Portable Memory Module Support	No	No	No	No



Micro 14 PLCs

The Micro 14 PLC is big on features; from up to 14 I/O built-in (expandable to 126 I/O) points to fast cycle times, robust instruction set, and generous memory to allow more flexible programming. And it's all packaged in a sturdy modular design for easy access and long-term durability. This all-in-one PLC gives you everything you need to control a wide variety of applications.

	IC200UDR001	IC200UDR002	IC200UDR003
Product Name	14 point (8) 24 VDC In, (6) Relay Out, 120/240 VAC Powered	14 point (8) 24 VDC In, (6) Relay Out, 24 VDC Powered	14 point (8) 12 VDC In, (6) Relay Out, 12 VDC Powered
Lifecycle Status	Active	Active	Active
Number of Discrete Inputs/Outputs	8 In / 6 Out (Supports 4 Expansion Units)	8 In / 6 Out (Supports 4 Expansion Units)	8 In / 6 Out (Supports 4 Expansion Units)
Number of Analog Inputs/Outputs	Supports up to 4 analog expansion units (16 analog in/ 8 analog out)	Supports up to 4 analog expansion units (16 analog in/ 8 analog out)	Supports up to 4 analog expansion units (16 analog in/ 8 analog out)
Physical I/O Maximum	126	126	126
User Program Logic Memory (Words)	9 K	9 K	9 K
Registers (Words)	256	256	256
Analog Pots for Data Adjustment	Yes, 2	Yes, 2	Yes, 2
Serial Port Connector Type	RJ-45 (RS-232)	RJ-45 (RS-232)	RJ-45 (RS-232)
Protocols	SNP, SNP X (Breakless) RTU Slave (2 and 4 wire RTU Slave). Serial Read and Write	SNP, SNP X (Breakless) RTU Slave (2 and 4 wire RTU Slave). Serial Read and Write	SNP, SNP X (Breakless) RTU Slave (2 and 4 wire RTU Slave). Serial Read and Write
Power Voltage	120/240 VAC	24 VDC	12 VDC
Input Power Supply Rating	13 VA	4 Watts	3 Watts
24 VDC User Power for Sensors	200 mA	200 mA	200 mA
Input Device Voltage	24 VDC	24 VDC	12 VDC
Maximum Type A and B Counters	4 Type A and 1 Type B @ 10Khz (16 bit)	4 Type A and 1 Type B @ 10Khz (16 bit)	4 Type A and 1 Type B @ 10Khz (16 bit)
Output Control Voltage	Relay Out	Relay Out	Relay Out
Relay Maximum Resistive Load Rating	2 Amps at 24 VDC and 240 VAC	2 Amps at 24 VDC and 240 VAC	2 Amps at 24 VDC and 240 VAC
Maximum Number of PWM/Pulse Outputs	0	0	0
Dimensions (W x H x D) mm	95 x 90 x 76	95 x 90 x 76	95 x 90 x 76
Programming Software	VersaPro 1.1 or greater, Machine Edition Logic Developer	VersaPro 1.1 or greater, Machine Edition Logic Developer	VersaPro 1.1 or greater, Machine Edition Logic Developer
Portable Memory Module Support	No	No	No

Micro 23 PLCs

The Micro 23 PLC is big on features with 23 discrete I/O and two analog inputs and one analog output built-in (expandable to 135 I/O) points. The Micro 23 executes fast cycle times, robust instruction set, and generous memory to allow more flexible programming. And it's all packaged in a sturdy modular design for easy access and long-term durability.



	IC200UAL004	IC200UAL005	IC200UAL006
Product Name	23 point; (13) 12 VDC In, (10) Relay Out, (2) Analog In and (1) Analog Out, 12 VDC Powered.	23 point; (13) 24 VDC In, (9) Relay Out, (1) 24 VDC Out, (2) Analog In and (1) Analog Out, 24 VDC Powered.	23 point; (13) 24 VDC In, (9) Relay Out, (1) 24 VDC Out, (2) Analog In and (1) Analog Out, 120/240 VAC Powered.
Lifecycle Status	Active	Active	Active
Number of Discrete Inputs/Outputs	13 In / 10 Out (Supports 4 Expansion Units)	13 In / 10 Out (Supports 4 Expansion Units)	13 In / 10 Out (Supports 4 Expansion Units)
Number of Analog Inputs/Outputs	2 analog in / 1 analog out built-in and supports up to 4 analog expansion units (16 analog in/ 8 analog out)	2 analog in / 1 analog out built-in and supports up to 4 analog expansion units (16 analog in/ 8 analog out)	2 analog in / 1 analog out built-in and supports up to 4 analog expansion units (16 analog in/ 8 analog out)
Physical I/O Maximum	135	135	135
User Program Logic Memory (Words)	9 K	9 K	9 K
Registers (Words)	2 K	2 K	2 K
Analog Pots for Data Adjustment	Yes, 2	Yes, 2	Yes, 2
Serial Port Connector Type	RJ-45 (RS-232) port 1 and DB-15 (RS-485 on port 2)	RJ-45 (RS-232) port 1 and DB-15 (RS-485 on port 2)	RJ-45 (RS-232) port 1 and DB-15 (RS-485 on port 2)
Protocols	Port 1, SNP, SNP X (Breakless); Port 2, SNP, SNP X (Breakless), RTU Master and Slave (2 and 4 wire RTU Slave), SNP Master, Serial Read and Write	Port 1, SNP, SNP X (Breakless); Port 2, SNP, SNP X (Breakless), RTU Master and Slave (2 and 4 wire RTU Slave), SNP Master, Serial Read and Write	Port 1, SNP, SNP X (Breakless); Port 2, SNP, SNP X (Breakless), RTU Master and Slave (2 and 4 wire RTU Slave), SNP Master, Serial Read and Write
Power Voltage	12 VDC	24 VDC	120/240 VAC
Input Power Supply Rating	8 Watts	8 Watts	34 VA
24 VDC User Power for Sensors	200 mA	200 mA	200 mA
Input Device Voltage	12 VDC	24 VDC	24 VDC
Maximum Type A and B Counters	4 Type A and 1 Type B @ 10KHz (16 bit)	4 Type A and 1 Type B @ 10KHz (16 bit)	4 Type A and 1 Type B @ 10KHz (16 bit)
Analog Input Ranges	0 to 10 VDC (10.24V max.) 0 to 20 mA (20.5 mA max.) 4 to 20 mA (20.5 mA max.); 12 bit Resolution	0 to 10 VDC (10.24V max.) 0 to 20 mA (20.5 mA max.) 4 to 20 mA (20.5 mA max.); 12 bit Resolution	0 to 10 VDC (10.24V max.) 0 to 20 mA (20.5 mA max.) 4 to 20 mA (20.5 mA max.); 12 bit Resolution
Output Control Voltage	Relay Out	Relay Out	Relay Out
Relay Maximum Resistive Load Rating	2 Amps at 24 VDC and 240 VAC	2 Amps at 24 VDC and 240 VAC	2 Amps at 24 VDC and 240 VAC
Maximum Number of PWM/Pulse Outputs	N/A	1 @ 5KHz (16 bit)	1 @ 5KHz (16 bit)
Analog Output Ranges	0 to 10 VDC (10.24V max.) 0 to 20 mA (20.5 mA max.) 4 to 20 mA (20.5 mA max.); 12 bit Resolution	0 to 10 VDC (10.24V max.) 0 to 20 mA (20.5 mA max.) 4 to 20 mA (20.5 mA max.); 12 bit Resolution	0 to 10 VDC (10.24V max.) 0 to 20 mA (20.5 mA max.) 4 to 20 mA (20.5 mA max.); 12 bit Resolution
Dimensions (W x H x D) mm	150 x 90 x 76	150 x 90 x 76	150 x 90 x 76
Programming Software	VersaPro 1.1 or greater, Machine Edition Logic Developer	VersaPro 1.1 or greater, Machine Edition Logic Developer	VersaPro 1.1 or greater, Machine Edition Logic Developer
Portable Memory Module Support	No	No	No

Micro 28 PLC

The Micro 28 PLC is big on features with the built-in 28 I/O (expandable to 140 I/O) points to fast cycle times, two built-in serial ports, robust instruction set, and generous memory to allow more flexible programming. And it's all packaged in a sturdy modular design for easy access and long-term durability. This all-in-one PLC gives you everything you need to control a wide variety of applications.

	IC200UAA007	IC200UAR028	IC200UDD110	IC200UDD120
Product Name	28 point; (16) 120 VAC In, (12) 120 VAC Out, 120/240 VAC Powered.	28 point, (16) 120 VAC In, (12) Relay Out, 120/240 VAC Powered.	28 point; (16) 24 VDC In, (12) 24 VDC Out (6) @ 1.0 A, (6) @ 0.5 A, 24 VDC Powered.	28 point; (16) 24 VDC In, (12) 24 VDC Out (6) @ 1.0 A, (6) @ 0.5 A, 24 VDC Powered.
Lifecycle Status	Active	Active	Active	Active
Number of Discrete Inputs/Outputs	16 In / 12 Out (Supports 4 Expansion Units)	16 In / 12 Out (Supports 4 Expansion Units)	16 In / 12 Out (Supports 4 Expansion Units)	16 In / 12 Out (Supports 4 Expansion Units)
Number of Analog Inputs/Outputs	Supports up to 4 analog expansion units (16 analog in/ 8 analog out)	Supports up to 4 analog expansion units (16 analog in/ 8 analog out)	Supports up to 4 analog expansion units (16 analog in/ 8 analog out)	Supports up to 4 analog expansion units (16 analog in/ 8 analog out)
Physical I/O Maximum	140	140	140	140
User Program Logic Memory (Words)	9 K	9 K	9 K	9 K
Registers (Words)	2 K	2 K	2 K	2 K
Analog Pots for Data Adjustment	Yes, 2	Yes, 2	Yes, 2	Yes, 2
Serial Port Connector Type	RJ-45 (RS-232) port 1 and DB-15 (RS-485 on port 2)	RJ-45 (RS-232) port 1 and DB-15 (RS-485 on port 2)	RJ-45 (RS-232) port 1 and DB-15 (RS-485 on port 2)	RJ-45 (RS-232) port 1 and DB-15 (RS-485 on port 2)
Protocols	Port 1, SNP, SNP X (Breakless); Port 2, SNP, SNP X (Breakless), RTU Master and Slave (2 and 4 wire RTU Slave), SNP Master, Serial Read and Write	Port 1, SNP, SNP X (Breakless); Port 2, SNP, SNP X (Breakless), RTU Master and Slave (2 and 4 wire RTU Slave), SNP Master, Serial Read and Write	Port 1, SNP, SNP X (Breakless); Port 2, SNP, SNP X (Breakless), RTU Master and Slave (2 and 4 wire RTU Slave), SNP Master, Serial Read and Write	Port 1, SNP, SNP X (Breakless); Port 2, SNP, SNP X (Breakless), RTU Master and Slave (2 and 4 wire RTU Slave), SNP Master, Serial Read and Write
Power Voltage	120/240 VAC	120/240 VAC	24 VDC	24 VDC
Input Power Supply Rating	16 VA	16 VA	5 Watts	5 Watts
24 VDC User Power for Sensors	N/A	200 mA	200 mA	200 mA
Input Device Voltage	120 VAC	120 VAC	24 VDC	24 VDC
Maximum Type A and B Counters	N/A	N/A	4 Type A and 1 Type B @ 10Khz (16 bit)	4 Type A and 1 Type B @ 10Khz (16 bit)
Output Control Voltage	120 VAC	Relay Out	24 VDC	24 VDC ESCP, Self Healing, No External Fusing Required
Relay Maximum Resistive Load Rating	N/A	10 @ 2 Amps at 24 VDC and 240 VAC; 2 @ 10 Amps at 24 VDC and 240 VAC	N/A	N/A
Maximum Number of PWM/Pulse Outputs	N/A	N/A	4 @ 5Khz (16 bit)	4 @ 5Khz (16 bit)
Dimensions (W x H x D) mm	150 x 90 x 76	150 x 90 x 76	150 x 90 x 76	150 x 90 x 76
Programming Software	VersaPro 1.1 or greater, Machine Edition Logic Developer	VersaPro 1.1 or greater, Machine Edition Logic Developer	VersaPro 1.1 or greater, Machine Edition Logic Developer	VersaPro 1.1 or greater, Machine Edition Logic Developer
Portable Memory Module Support	No	No	No	No

Micro 28 PLC



The Micro 28 PLC is big on features with the built-in 28 I/O (expandable to 140 I/O) points to fast cycle times, two built-in serial ports, robust instruction set, and generous memory to allow more flexible programming. And it's all packaged in a sturdy modular design for easy access and long-term durability. This all-in-one PLC gives you everything you need to control a wide variety of applications.

	IC200UDD212	IC200UDR005	IC200UDR006	IC200UDR228	IC200UDR010
Product Name	28 point (16) 12 VDC In, (12) 12 VDC Out, 0.7A, 12 VDC Powered	28 point (16) 24 VDC In, (11) Relay Out, (1) 24 VDC Out, 120/240 VAC Powered	28 point (16) 12 VDC In, (12) Relay Out, 12 VDC Powered	28 point (16) 24 VDC In, (11) Relay Out, (1) 24 VDC Out, 12/24 VDC Powered	28 point (16) 24 VDC In, (11) Relay Out, (1) 24 VDC Out, 24 VDC Powered
Lifecycle Status	Active	Active	Active	Active	Active
Number of Discrete Inputs/Outputs	16 In / 12 Out (Supports 4 Expansion Units)	16 In / 12 Out (Supports 4 Expansion Units)	16 In / 12 Out (Supports 4 Expansion Units)	16 In / 12 Out (Supports 4 Expansion Units)	16 In / 12 Out (Supports 4 Expansion Units)
Number of Analog Inputs/Outputs	Supports up to 4 analog expansion units (16 analog in/ 8 analog out)	Supports up to 4 analog expansion units (16 analog in/ 8 analog out)	Supports up to 4 analog expansion units (16 analog in/ 8 analog out)	Supports up to 4 analog expansion units (16 analog in/ 8 analog out)	Supports up to 4 analog expansion units (16 analog in/ 8 analog out)
Physical I/O Maximum	140	140	140	140	140
User Program Logic Memory (Words)	9 K	9 K	9 K	9 K	9 K
Registers (Words)	2 K	2 K	2 K	2 K	2 K
Analog Pots for Data Adjustment	Yes, 2	Yes, 2	Yes, 2	Yes, 2	Yes, 2
Serial Port Connector Type	RJ-45 (RS-232) port 1 and DB-15 (RS-485 on port 2)	RJ-45 (RS-232) port 1 and DB-15 (RS-485 on port 2)	RJ-45 (RS-232) port 1 and DB-15 (RS-485 on port 2)	RJ-45 (RS-232) port 1 and DB-15 (RS-485 on port 2)	RJ-45 (RS-232) port 1 and DB-15 (RS-485 on port 2)
Protocols	Port 1, SNP, SNP X (Breakless); Port 2, SNP, SNP X (Breakless), RTU Master and Slave (2 and 4 wire RTU Slave), SNP Master, Serial Read and Write	Port 1, SNP, SNP X (Breakless); Port 2, SNP, SNP X (Breakless), RTU Master and Slave (2 and 4 wire RTU Slave), SNP Master, Serial Read and Write	Port 1, SNP, SNP X (Breakless); Port 2, SNP, SNP X (Breakless), RTU Master and Slave (2 and 4 wire RTU Slave), SNP Master, Serial Read and Write	Port 1, SNP, SNP X (Breakless); Port 2, SNP, SNP X (Breakless), RTU Master and Slave (2 and 4 wire RTU Slave), SNP Master, Serial Read and Write	Port 1, SNP, SNP X (Breakless); Port 2, SNP, SNP X (Breakless), RTU Master and Slave (2 and 4 wire RTU Slave), SNP Master, Serial Read and Write
Power Voltage	12 VDC	120/240 VAC	12 VDC	12/24 VDC	24 VDC
Input Power Supply Rating	8 Watts	26 VA	8 Watts	8 Watts	8 Watts
24 VDC User Power for Sensors	200 mA	200 mA	200 mA	140 mA	200 mA
Input Device Voltage	12 VDC	24 VDC	12 VDC	24 VDC	24 VDC
Maximum Type A and B Counters	4 Type A and 1 Type B @ 10Khz (16 bit)	4 Type A and 1 Type B @ 10Khz (16 bit)	4 Type A and 1 Type B @ 10Khz (16 bit)	4 Type A and 1 Type B @ 10Khz (16 bit)	4 Type A and 1 Type B @ 10Khz (16 bit)
Output Control Voltage	12 VDC	Relay Out	Relay Out	Relay Out	Relay Out
Relay Maximum Resistive Load Rating	N/A	2 Amps at 24 VDC and 240 VAC	2 Amps at 24 VDC and 240 VAC	2 Amps at 24 VDC and 240 VAC	2 Amps at 24 VDC and 240 VAC
Maximum Number of PWM/Pulse Outputs	4 @ 5Khz (32 bit)	1 @ 5Khz (16 bit)	1 @ 5Khz (16 bit)	1 @ 5Khz (16 bit)	1 @ 5Khz (16 bit)
Dimensions (W x H x D) mm	150 x 90 x 76	150 x 90 x 76	150 x 90 x 76	150 x 90 x 76	150 x 90 x 76
Programming Software	VersaPro 1.1 or greater, Machine Edition Logic Developer	VersaPro 1.1 or greater, Machine Edition Logic Developer	VersaPro 1.1 or greater, Machine Edition Logic Developer	Machine Edition Logic Developer 5.0, Service Pack 3, Hotfix	VersaPro 1.1 or greater, Machine Edition Logic Developer
Portable Memory Module Support	No	No	No	No	No

Micro 20 PLC



The Micro 20 PLC is big on features, expandable to 132 I/O points to fast cycle times, robust instruction set, and generous memory to allow more flexible programming. The optional second port provides you with the option of an additional RS-232 port, RS-485, USB, or Ethernet. The serial expansion ports come with two analog input channels. A user-friendly memory module is available to easily download changes to the controller without the need of a PC. And it's all packaged in a sturdy modular design for easy access and long-term durability. This all-in-one PLC gives you everything you need to control a wide variety of applications.

	IC200UDD020	IC200UDD220	IC200UDR120	IC200UDR020
Product Name	Micro 20; (12) 24 VDC In, (8) 24 VDC Source Out 0.7 amps with ESCP protection, 24 VDC Powered	Micro 20; (12) 24 VDC In, (8) 24 VDC Sink Out, 24 VDC Powered	Micro 20; (12) 24 VDC In, (8) Relay Out 2.0 amps, 120/240VAC Powered	Micro 20; (12) 24 VDC In, (8) Relay Out 2.0 amps, 24VDC Powered
Lifecycle Status	Active	Active	Active	Active
Number of Discrete Inputs/Outputs	12 In / 8 Out (Supports 4 Expansion Units)	12 In / 8 Out (Supports 4 Expansion Units)	12 In / 8 Out (Supports 4 Expansion Units)	12 In / 8 Out (Supports 4 Expansion Units)
Number of Analog Inputs/Outputs	Supports up to 4 analog expansion units (16 analog in/ 8 analog out)	Supports up to 4 analog expansion units (16 analog in/ 8 analog out)	Supports up to 4 analog expansion units (16 analog in/ 8 analog out)	Supports up to 4 analog expansion units (16 analog in/ 8 analog out)
Physical I/O Maximum	132	132	132	132
User Program Logic Memory (Words)	24 K	24 K	24 K	24 K
Registers (Words)	32 K	32 K	32 K	32 K
Analog Pots for Data Adjustment	No	No	No	No
Serial Port Connector Type	RJ-45 (RS-232) port 1 and optional port 2 DB-15 (RS-485) or RJ-45 (RS-232) or USB or RJ-45 (Ethernet 10/100Mbit)	RJ-45 (RS-232) port 1 and optional port 2 DB-15 (RS-485) or RJ-45 (RS-232) or USB or RJ-45 (Ethernet 10/100Mbit)	RJ-45 (RS-232) port 1 and optional port 2 DB-15 (RS-485) or RJ-45 (RS-232) or USB or RJ-45 (Ethernet 10/100Mbit)	RJ-45 (RS-232) port 1 and optional port 2 DB-15 (RS-485) or RJ-45 (RS-232) or USB or RJ-45 (Ethernet 10/100Mbit)
Protocols	Both Ports: SNP, SNP X (Breakless), RTU Master and Slave 2 and 4 wire RTU Slave), SNP Master, Serial Read and Write; Ethernet SRTTP, Modbus TCP (server) and Tunneling	Both Ports: SNP, SNP X (Breakless), RTU Master and Slave 2 and 4 wire RTU Slave), SNP Master, Serial Read and Write; Ethernet SRTTP, Modbus TCP (server) and Tunneling	Both Ports: SNP, SNP X (Breakless), RTU Master and Slave 2 and 4 wire RTU Slave), SNP Master, Serial Read and Write; Ethernet SRTTP, Modbus TCP (server) and Tunneling	Both Ports: SNP, SNP X (Breakless), RTU Master and Slave 2 and 4 wire RTU Slave), SNP Master, Serial Read and Write; Ethernet SRTTP, Modbus TCP (server) and Tunneling
Power Voltage	24 VDC	24 VDC	120/240 VAC	24 VDC
Input Power Supply Rating	10 Watts	10 Watts	35 VA	10 Watts
24 VDC User Power for Sensors	435 mA	435 mA	435 mA	435 mA
Input Device Voltage	24 VDC	24 VDC	24 VDC	24 VDC
Maximum Type A and B Counters	4 Type A and 1 Type B @ 100Khz (32 bit)	4 Type A and 1 Type B @ 100Khz (32 bit)	4 Type A and 1 Type B @ 100Khz (32 bit)	4 Type A and 1 Type B @ 100Khz (32 bit)
Output Control Voltage	24 VDC ESCP; Self Healing; No External Fusing Required	24 VDC Sink	Relay Out	Relay Out
Relay Maximum Resistive Load Rating	N/A	N/A	2 Amps at 24 VDC and 240 VAC	2 Amps at 24 VDC and 240 VAC
Maximum Number of PWM/Pulse Outputs	4 @ 65Khz (32 bit)	4 @ 65Khz (32 bit)	N/A	N/A
Dimensions (W x H x D) mm	150 x 90 x 76	150 x 90 x 76	150 x 90 x 76	150 x 90 x 76
Programming Software	Machine Edition Logic Developer 5.0, Service Pack 3, Hotfix	Machine Edition Logic Developer 5.0, Service Pack 3, Hotfix	Machine Edition Logic Developer 5.0, Service Pack 3, Hotfix	Machine Edition Logic Developer 5.0, Service Pack 3, Hotfix
Portable Memory Module Support	Yes	Yes	Yes	Yes

Micro 40 PLC



The Micro 40 PLC is big on features, expandable to 152 I/O points to fast cycle times, robust instruction set, and generous memory to allow more flexible programming. The optional second port provides you with the option of an additional RS-232 port, RS-485, USB, or Ethernet. The serial expansion ports come with two analog input channels. A user-friendly memory module is available to easily download changes to the controller without the need of a PC. And it's all packaged in a sturdy modular design for easy access and long-term durability. This all-in-one PLC gives you everything you need to control a wide variety of applications.

	IC200UDD040	IC200UDD240	IC200UDR140	IC200UDR040	IC200UDR440
Product Name	Micro 40; (24) 24 VDC In, (16) 24 VDC Source Out, 0.7 amps with ESCP protection, 24 VDC Powered	Micro 40; (24) 24 VDC In, (16) 24 VDC Sink Out, 24 VDC Powered	Micro 40; (24) 24 VDC In, (16) Relay Out 2.0 amps, 120/240 VAC Powered	Micro 40; (24) 24 VDC In, (16) Relay Out 2.0 amps, 24 VDC Powered	Micro 40; (24) 24 VDC In, (16) Relay Out 2.0 amps 12/24 VDC Powered
Lifecycle Status	Active	Active	Active	Active	Active
Number of Discrete Inputs/Outputs	24 In / 16 Out (Supports 4 Expansion Units)	24 In / 16 Out (Supports 4 Expansion Units)	24 In / 16 Out (Supports 4 Expansion Units)	24 In / 16 Out (Supports 4 Expansion Units)	24 In / 16 Out (Supports 4 Expansion Units)
Number of Analog Inputs/Outputs	Supports up to 4 analog expansion units (16 analog in/ 8 analog out)	Supports up to 4 analog expansion units (16 analog in/ 8 analog out)	Supports up to 4 analog expansion units (16 analog in/ 8 analog out)	Supports up to 4 analog expansion units (16 analog in/ 8 analog out)	Supports up to 4 analog expansion units (16 analog in/ 8 analog out)
Physical I/O Maximum	152	152	152	152	152
User Program Logic Memory (Words)	24 K	24 K	24 K	24 K	24 K
Registers (Words)	32 K	32 K	32 K	32 K	32 K
Analog Pots for Data Adjustment	No	No	No	No	No
Serial Port Connector Type	RJ-45 (RS-232) port 1 and optional port 2 DB-15 (RS-485) or RJ-45 (RS-232) or USB or RJ-45 (Ethernet 10/100Mbit)	RJ-45 (RS-232) port 1 and optional port 2 DB-15 (RS-485) or RJ-45 (RS-232) or USB or RJ-45 (Ethernet 10/100Mbit)	RJ-45 (RS-232) port 1 and optional port 2 DB-15 (RS-485) or RJ-45 (RS-232) or USB or RJ-45 (Ethernet 10/100Mbit)	RJ-45 (RS-232) port 1 and optional port 2 DB-15 (RS-485) or RJ-45 (RS-232) or USB or RJ-45 (Ethernet 10/100Mbit)	RJ-45 (RS-232) port 1 and optional port 2 DB-15 (RS-485) or RJ-45 (RS-232) or USB or RJ-45 (Ethernet 10/100Mbit)
Protocols	Both Ports: SNP, SNP X (Breakless), RTU Master and Slave (2 and 4 wire RTU Slave), SNP Master, Serial Read and Write; Ethernet SRTTP, Modbus TCP (server) and Tunneling	Both Ports: SNP, SNP X (Breakless), RTU Master and Slave (2 and 4 wire RTU Slave), SNP Master, Serial Read and Write; Ethernet SRTTP, Modbus TCP (server) and Tunneling	Both Ports: SNP, SNP X (Breakless), RTU Master and Slave (2 and 4 wire RTU Slave), SNP Master, Serial Read and Write; Ethernet SRTTP, Modbus TCP (server) and Tunneling	Both Ports: SNP, SNP X (Breakless), RTU Master and Slave (2 and 4 wire RTU Slave), SNP Master, Serial Read and Write; Ethernet SRTTP, Modbus TCP (server) and Tunneling	Both Ports: SNP, SNP X (Breakless), RTU Master and Slave (2 and 4 wire RTU Slave), SNP Master, Serial Read and Write; Ethernet SRTTP, Modbus TCP (server) and Tunneling
Power Voltage	24 VDC	24 VDC	120/240 VAC	24 VDC	12/24 VDC
Input Power Supply Rating	10 Watts	10 Watts	35 VA	10 Watts	10 Watts
24 VDC User Power for Sensors	435 mA	435 mA	435 mA	435 mA	120 mA
Input Device Voltage	24 VDC	24 VDC	24 VDC	24 VDC	24 VDC
Maximum Type A and B Counters	4 Type A and 1 Type B @ 100Khz (32 bit)	4 Type A and 1 Type B @ 100Khz (32 bit)	4 Type A and 1 Type B @ 100Khz (32 bit)	4 Type A and 1 Type B @ 100Khz (32 bit)	4 Type A and 1 Type B @ 100Khz (32 bit)
Output Control Voltage	24 VDC ESCP; Self Healing; No External Fusing Required	24 VDC Sink	Relay Out	Relay Out	Relay Out
Relay Maximum Resistive Load Rating	N/A	N/A	2 Amps at 24 VDC and 240 VA	2 Amps at 24 VDC and 240 VA	2 Amps at 24 VDC and 240 VA
Maximum Number of PWM/Pulse Outputs	4 @ 65Khz (32 bit)	4 @ 65Khz (32 bit)	N/A	N/A	N/A
Dimensions (W x H x D) mm	150 x 90 x 76	150 x 90 x 76	150 x 90 x 76	150 x 90 x 76	150 x 90 x 76
Programming Software	Machine Edition Logic Developer 5.0, Service Pack 3, Hotfix	Machine Edition Logic Developer 5.0, Service Pack 3, Hotfix	Machine Edition Logic Developer 5.0, Service Pack 3, Hotfix	Machine Edition Logic Developer 5.0, Service Pack 3, Hotfix	Machine Edition Logic Developer 5.0, Service Pack 3, Hotfix
Portable Memory Module Support	Yes	Yes	Yes	Yes	Yes

Micro 64 PLC



The Micro 64 PLC is big on features, expandable to 176 I/O points to fast cycle times, robust instruction set, and generous memory to allow more flexible programming. The optional second port provides you with the option of an additional RS-232 port, RS-485, USB, or Ethernet. The serial expansion ports come with two analog input channels. A user-friendly memory module is available to easily download changes to the controller without the need of a PC. And it's all packaged in a sturdy modular design for easy access and long-term durability. This all-in-one PLC gives you everything you need to control a wide variety of applications.

	IC200UDD064	IC200UDD164	IC200UDR164	IC200UDR064
Product Name	Micro 64; (40) 24 VDC In, (24) 24 VDC Source Out 0.7 amps with ESCP protection, 24 VDC Powered.	Micro 64; (40) 24 VDC In, (24) 24 VDC Sink Out 0.7 amps, 24 VDC Powered.	Micro 64; (40) 24 VDC In, (24) Relay Out 2.0 amps, 120/240 VAC Powered.	Micro 64; (40) 24 VDC In, (24) Relay Out 2.0 amps, 24 VDC Powered.
Lifecycle Status	Active	Active	Active	Active
Number of Discrete Inputs/Outputs	40 In / 24 Out (Supports 4 Expansion Units)	40 In / 24 Out (Supports 4 Expansion Units)	40 In / 24 Out (Supports 4 Expansion Units)	40 In / 24 Out (Supports 4 Expansion Units)
Number of Analog Inputs/Outputs	Supports up to 4 analog expansion units (16 analog in/ 8 analog out)	Supports up to 4 analog expansion units (16 analog in/ 8 analog out)	Supports up to 4 analog expansion units (16 analog in/ 8 analog out)	Supports up to 4 analog expansion units (16 analog in/ 8 analog out)
Physical I/O Maximum	176	176	176	176
User Program Logic Memory (Words)	24K	24K	24 K	24 K
Registers (Words)	32 K	32 K	32 K	32 K
Analog Pots for Data Adjustment	No	No	No	No
Serial Port Connector Type	RJ-45 (RS-232) port 1 and optional port 2 DB-15 (RS-485) or RJ-45 (RS-232) or USB or RJ-45 (Ethernet 10/100 Mbit)	RJ-45 (RS-232) port 1 and optional port 2 DB-15 (RS-485) or RJ-45 (RS-232) or USB or RJ-45 (Ethernet 10/100 Mbit)	RJ-45 (RS-232) port 1 and optional port 2 DB-15 (RS-485) or RJ-45 (RS-232) or USB or RJ-45 (Ethernet 10/100 Mbit)	RJ-45 (RS-232) port 1 and optional port 2 DB-15 (RS-485) or RJ-45 (RS-232) or USB or RJ-45 (Ethernet 10/100 Mbit)
Protocols	Both Ports: SNP, SNP X (Breakless), RTU Master and Slave (2 and 4 wire RTU Slave), SNP Master, Serial Read and Write; Ethernet SRTP, Modbus TCP (server) and Tunneling	Both Ports: SNP, SNP X (Breakless), RTU Master and Slave (2 and 4 wire RTU Slave), SNP Master, Serial Read and Write; Ethernet SRTP, Modbus TCP (server) and Tunneling	Both Ports: SNP, SNP X (Breakless), RTU Master and Slave (2 and 4 wire RTU Slave), SNP Master, Serial Read and Write; Ethernet SRTP, Modbus TCP (server) and Tunneling	Both Ports: SNP, SNP X (Breakless), RTU Master and Slave (2 and 4 wire RTU Slave), SNP Master, Serial Read and Write; Ethernet SRTP, Modbus TCP (server) and Tunneling
Power Voltage	24 VDC	24 VDC	120/240 VAC	24 VDC
Input Power Supply Rating	10 Watts	10 Watts	35 VA	10 Watts
24 VDC User Power for Sensors	435 mA	435 mA	435 mA	435 mA
Input Device Voltage	24 VDC	24 VDC	24 VDC	24 VDC
Maximum Type A and B Counters	4 Type A and 1 Type B @ 100Khz (32 bit)	4 Type A and 1 Type B @ 100Khz (32 bit)	4 Type A and 1 Type B @ 100Khz (32 bit)	4 Type A and 1 Type B @ 100Khz (32 bit)
Output Control Voltage	24 VDC ESCP, Self Healing, No External Fusing Required	24 VDC Sink	Relay Out	Relay Out
Relay Maximum Resistive Load Rating	N/A	N/A	2 Amps at 24 VDC and 240 VAC	2 Amps at 24 VDC and 240 VAC
Maximum Number of PWM/Pulse Outputs	4 @ 65Khz (32 bit)	4 @ 65Khz (32 bit)	N/A	N/A
Dimensions (W x H x D) mm	190 x 90 x 76	190 x 90 x 76	190 x 90 x 76	190 x 90 x 76
Programming Software	Machine Edition Logic Developer 5.0, Service Pack 3, Hotfix	Machine Edition Logic Developer 5.0, Service Pack 3, Hotfix	Machine Edition Logic Developer 5.0, Service Pack 3, Hotfix	Machine Edition Logic Developer 5.0, Service Pack 3, Hotfix
Portable Memory Module Support	Yes	Yes	Yes	Yes

Discrete Expansion Selection Guide

Model	Module Input Power	12 VDC Inputs	12 VDC Outputs	24 VDC Inputs	120 VAC Input	24 VDC Outputs Source	24 VDC Outputs with ESCP	24 VDC Sink Outputs	120 VAC Output	Relay Outputs, 2 Amps	Relay Outputs, 5 Amps	Relay Outputs 10 Amps
IC200UEI08	24 VDC			8 Inputs								
IC200UEI016	24 VDC			16 Inputs								
IC200UEO008	24 VDC						8 Outputs					
IC200UEO016	24 VDC						16 Outputs					
IC200UEO108	24 VDC							8 Outputs				
IC200UEO116	24 VDC							16 Outputs				
IC200UER508	24 VDC										8 Outputs	
IC200UER008	24 VDC									8 Outputs		
IC200UER016	24 VDC									16 Outputs		
IC200UEC008	24 VDC			4 Inputs/ 4 Source Outputs			4 Inputs/ 4 Source Outputs					
IC200UEC108	24 VDC			4 Inputs/ 4 Sink Outputs				4 Inputs/ 4 Sink Outputs				
IC200UEC208	24 VDC			4 Inputs/ 4 Relay Outputs						4 Inputs/ 4 Relay Outputs		
IC200UEX015	12 VDC	8 Inputs/ 6 12 VDC Outputs	8 Inputs/ 6 12 VDC Outputs									
IC200UEX013	12 VDC	8 Inputs/ 6 Relay Outputs								8 Inputs/ 6 Relay Outputs		
IC200UEX014	24 VDC			8 Inputs/ 6 24 VDC Outputs		8 Inputs/ 6 24 VDC Outputs						
IC200UEX122	24 VDC			8 Inputs/ 6 24 VDC Outputs with ESCP			8 Inputs/ 6 24 VDC Outputs with ESCP					
IC200UEX012	24 VDC			8 Inputs/ 6 Relay Outputs						8 Inputs/ 6 Relay Outputs		
IC200UEX011	120/ 240 VAC			8 Inputs/ 6 Relay Outputs						8 Inputs/ 6 Relay Outputs		
IC200UEX009	120/ 240 VAC				8 Inputs/ 6 Relay Outputs (4 @ 2 amps and 2 @ 10 amps)					8 Inputs/ 6 Relay Outputs (4 @ 2 amps and 2 @ 10 amps)		8 Inputs/ 6 Relay Outputs (4 @ 2 amps and 2 @ 10 amps)
IC200UEX010	120/ 240 VAC				8 Inputs/ 6 AC Outputs				8 Inputs/ 6 AC Outputs			
IC200UEX215	12 VDC	16 Inputs/ 12 12 VDC Outputs	16 Inputs/ 12 12 VDC Outputs									
IC200UEX213	12 VDC	16 Inputs/ 12 Relay Outputs								8 Inputs/ 6 Relay Outputs		
IC200UEX214	24 VDC			16 Inputs/ 12 24 VDC Outputs		16 Inputs/ 12 24 VDC Outputs						
IC200UEX222	24 VDC			16 Inputs/ 12 24 VDC Outputs with ESCP			16 Inputs/ 12 24 VDC Outputs with ESCP					
IC200UEX212	24 VDC			16 Inputs/ 12 Relay Outputs						16 Inputs/ 12 Relay Outputs		
IC200UEX211	120/ 240 VAC			16 Inputs/ 12 Relay Outputs						16 Inputs/ 12 Relay Outputs		
IC200UEX209	120/ 240 VAC				16 Inputs/ 12 Relay Outputs (10 @ 2 amps and 2 @ 10 amps)					16 Inputs/ 12 Relay Outputs (10 @ 2 amps and 2 @ 10 amps)		16 Inputs/ 12 Relay Outputs (10 @ 2 amps and 2 @ 10 amps)
IC200UEX210	120/ 240 VAC				16 Inputs/ 12 AC Outputs				16 Inputs/ 12 AC Outputs			
IC200UEX264*	24 VDC			40 Inputs/ 24 24 VDC Outputs			40 Inputs/ 24 24 VDC Outputs					
IC200UEX364*	24 VDC			40 Inputs/ 24 24 VDC Outputs		40 Inputs/ 24 24 VDC Outputs						
IC200UEX064*	24 VDC			40 Inputs/ 24 Relay Outputs						40 Inputs/ 24 Relay Outputs		
IC200UEX164*	120/ 240 VAC			40 Inputs/ 24 Relay Outputs						40 Inputs/ 24 Relay Outputs		

*Micro 20, 40 and 64 support only.

Discrete Expansion Units



The VersaMax Micro's modular design provides you with remarkable flexibility in a compact control. The versatile Micro PLC can support up to four Expansion Units of any mix of discrete or analog.

	IC200UEI008	IC200UEI016	IC200UEO008	IC200UEO016	IC200UEO108	IC200UEO116
Product Name	8 point (8) 24 VDC In, 24 VDC Powered	16 point (16) 24 VDC In, 24 VDC Powered	8 point (8) 24 VDC Output with ESCP Protection, 24 VDC Powered	16 point (16) 24 VDC Output with ESCP Protection, 24 VDC Powered	8 point (8) 24 VDC Sink Output, 24 VDC Powered	16 point (16) 24 VDC Sink Output, 24 VDC Powered
Lifecycle Status	Active	Active	Active	Active	Active	Active
Micro Type Restrictions	N/A	N/A	N/A	N/A	N/A	N/A
Number of Discrete Inputs/Outputs	8 In	16 In	8 Out	16 Out	8 Out	16 Out
Power Voltage	24 VDC	24 VDC	24 VDC	24 VDC	24 VDC	24 VDC
Input Power Supply Rating	4 Watts	4 Watts	4 Watts	4 Watts	4 Watts	4 Watts
24 VDC User Power for Sensors	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA
Input Device Voltage	24 VDC	24 VDC	N/A	N/A	N/A	N/A
Output Control Voltage	N/A	N/A	24 VDC ESCP, Self Healing, No External Fusing Required	24 VDC ESCP, Self Healing, No External Fusing Required	24 VDC Sink	24 VDC Sink
Relay Maximum Resistive Load Rating	N/A	N/A	N/A	N/A	N/A	N/A
Dimensions (W x H x D) mm	95 x 90 x 76	95 x 90 x 76	95 x 90 x 76	95 x 90 x 76	95 x 90 x 76	95 x 90 x 76

Discrete Expansion Units



The VersaMax Micro's modular design provides you with remarkable flexibility in a compact control. The versatile Micro PLC can support up to four Expansion Units of any mix of discrete or analog.

	IC200UER508	IC200UER008	IC200UER016	IC200UEC008	IC200UEC108	IC200UEC208
Product Name	8 point (8) 5 Amp Relay Out, 24 VDC Power Supply (not UL approved)	8 point (8) 2 Amp Relay Out, 24 VDC Power Supply	16 point (16) Relay Out, 24 VDC Power Supply	8 point (4) 24 VDC In, (4) 24 VDC Out with ESCP Protection, 24 VDC Power Supply	8 point (4) 24 VDC In, (4) 24 VDC Sink Out, 24 VDC Power Supply	8 point (4) 24 VDC In, (4) Relay Out, 24 VDC Power Supply
Lifecycle Status	Active	Active	Active	Active	Active	Active
Micro Type Restrictions	None	None	None	None	None	None
Number of Discrete Inputs/Outputs	8 Out	8 Out	16 Out	4 In / 4 Out	4 In / 4 Out	4 In / 4 Out
Power Voltage	24 VDC	24 VDC	24 VDC	24 VDC	24 VDC	24 VDC
Input Power Supply Rating	4 Watts	4 Watts	4 Watts	4 Watts	4 Watts	4 Watts
24 VDC User Power for Sensors	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA
Input Device Voltage	N/A	N/A	N/A	24 VDC	24 VDC	24 VDC
Output Control Voltage	Relay Out	Relay Out	Relay Out	24 VDC ESCP, Self Healing, No External Fusing Required	24 VDC Sink	Relay Out
Relay Maximum Resistive Load Rating	5 Amps at 24 VDC and 240 VAC	2 Amps at 24 VDC and 240 VAC	2 Amps at 24 VDC and 240 VAC	N/A	N/A	2 Amps at 24 VDC and 240 VAC
Dimensions (W x H x D) mm	95 x 90 x 76	95 x 90 x 76	95 x 90 x 76	95 x 90 x 76	95 x 90 x 76	95 x 90 x 76

Discrete Expansion Units



The VersaMax Micro's modular design provides you with remarkable flexibility in a compact control. The versatile Micro PLC can support up to four Expansion Units of any mix of discrete or analog.

	IC200UEX015	IC200UEX013	IC200UEX014	IC200UEX122	IC200UEX012	IC200UEX011
Product Name	14 point (8) 12 VDC In, (6) 12 VDC Out, 12 VDC Powered	14 point (8) 12 VDC In, (6) Relay Out, 12 VDC Powered	14 point (8) 24 VDC In, (6) 24 VDC Out, 24 VDC Powered	14 point (8) 24 VDC In, (6) 24 VDC Out with ESCP, 24 VDC Powered	14 point (8) 24 VDC In, (6) Relay Out, 24 VDC Powered	14 point (8) 24 VDC In, (6) Relay Out, 120/240 VAC Powered
Lifecycle Status	Active	Active	Active	Active	Active	Active
Micro Type Restrictions	N/A	N/A	N/A	N/A	N/A	N/A
Number of Discrete Inputs/Outputs	8 In / 6 Out	8 In / 6 Out	8 In / 6 Out	8 In / 6 Out	8 In / 6 Out	8 In / 6 Out
Power Voltage	12 VDC	12 VDC	24 VDC	24 VDC	24 VDC	120/240 VAC
Input Power Supply Rating	4 Watts	4 Watts	4 Watts	4 Watts	4 Watts	13 VA
24 VDC User Power for Sensors	200 mA	200 mA	200 mA	200 mA	200 mA	200 mA
Input Device Voltage	12 VDC	12 VDC	24 VDC	24 VDC	24 VDC	24 VDC
Output Control Voltage	12 VDC	Relay Out	24 VDC	24 VDC ESCP, Self Healing, No External Fusing Required	Relay Out	Relay Out
Relay Maximum Resistive Load Rating	N/A	2 Amps at 24 VDC and 240 VAC	N/A	N/A	2 Amps at 24 VDC and 240 VAC	2 Amps at 24 VDC and 240 VAC
Dimensions (W x H x D) mm	95 x 90 x 76	95 x 90 x 76	95 x 90 x 76	95 x 90 x 76	95 x 90 x 76	95 x 90 x 76

Discrete Expansion Units



The VersaMax Micro's modular design provides you with remarkable flexibility in a compact control. The versatile Micro PLC can support up to four Expansion Units of any mix of discrete or analog.

	IC200UEX009	IC200UEX010	IC200UEX215	IC200UEX213	IC200UEX214
Product Name	14 point (8) 120 VAC In, (6) Relay Out (2 outputs at 10 amp and 4 outputs at 2 amp), 120/240 VAC Powered	14 point (8) 120 VAC In, (6) 120 VAC Out, 120/240 VAC Powered	28 point (16) 12 VDC In, (12) 12 VDC Out, 12 VDC Powered	28 point (16) 12 VDC In, (12) Relay Out, 12 VDC Powered	28 point (16) 24 VDC In, (12) 24 VDC Out, 24 VDC Powered
Lifecycle Status	Active	Active	Active	Active	Active
Micro Type Restrictions	N/A	N/A	N/A	N/A	N/A
Number of Discrete Inputs/Outputs	8 In / 6 Out	8 In / 6 Out	16 In / 12 Out	16 In / 12 Out	16 In / 12 Out
Power Voltage	120/240 VAC	120/240 VAC	12 VDC	12 VDC	24 VDC
Input Power Supply Rating	11 VA	11 VA	8 Watts	8 Watts	5 Watts
24 VDC User Power for Sensors	200 mA	200 mA	200 mA	200 mA	200 mA
Input Device Voltage	120 VAC	120 VAC	12 VDC	12 VDC	24 VDC
Output Control Voltage	Relay Out (2 at 10 Amps and 4 at 2 Amps)	120 VAC	12 VDC	Relay Out	24 VDC
Relay Maximum Resistive Load Rating	2 Amps at 24 VDC and 240 VAC; 10 Amp at 24 VDC and 240 VAC	N/A	N/A	2 Amps at 24 VDC and 240 VAC	N/A
Dimensions (W x H x D) mm	95 x 90 x 76	95 x 90 x 76	150 x 90 x 76	150 x 90 x 76	150 x 90 x 76

Discrete Expansion Units



The VersaMax Micro's modular design provides you with remarkable flexibility in a compact control. The versatile Micro PLC can support up to four Expansion Units of any mix of discrete or analog.

	IC200UEX222	IC200UEX212	IC200UEX211	IC200UEX209	IC200UEX210
Product Name	28 point (16) 24 VDC In, (12) 24 VDC Out with ESCP, 24 VDC Powered	28 point (16) 24 VDC In, (12) Relay Out, 24 VDC Powered	28 point (16) 24 VDC In, (12) Relay Out, 120/240 VAC Powered	28 point (16) 120 VAC In, (12) Relay Out (2 outputs at 10 amp and 10 outputs at 2 amp), 120/240 VAC Powered	28 point (16) 24 VDC In, (12) 120 VAC Out, 120/240 VAC Powered
Lifecycle Status	Active	Active	Active	Active	Active
Micro Type Restrictions	N/A	N/A	N/A	N/A	N/A
Number of Discrete Inputs/Outputs	16 In / 12 Out	16 In / 12 Out	16 In / 12 Out	16 In / 12 Out	16 In / 12 Out
Power Voltage	24 VDC	24 VDC	120/240 VAC	120/240 VAC	120/240 VAC
Input Power Supply Rating	5 Watts	8 Watts	26 VA	16 VA	16 VA
24 VDC User Power for Sensors	200 mA	200 mA	200 mA	200 mA	200 mA
Input Device Voltage	24 VDC	24 VDC	24 VDC	120 VAC	120 VAC
Output Control Voltage	24 VDC ESCP, Self Healing, No External Fusing Required	Relay Out	Relay Out	Relay Out (2 at 10 Amps and 10 at 2 Amps)	120 VAC
Relay Maximum Resistive Load Rating	N/A	2 Amps at 24 VDC and 240 VAC	2 Amps at 24 VDC and 240 VAC	2 Amps at 24 VDC and 240 VAC; 10 Amps at 24 VDC and 240 VAC	N/A
Dimensions (W x H x D) mm	150 x 90 x 76	150 x 90 x 76	150 x 90 x 76	150 x 90 x 76	150 x 90 x 76

Discrete Expansion Units



The VersaMax Micro's modular design provides you with remarkable flexibility in a compact control. The versatile Micro PLC can support up to four Expansion Units of any mix of discrete or analog.

	IC200UEX064	IC200UEX164	IC200UEX264	IC200UEX364
Product Name	64 point (40) 24 VDC In, (24) Relay Out, 24 VDC Powered	64 point (40) 24 VDC In, (24) Relay Out, 120/240 VAC Powered	64 point (40) 24 VDC In, (24) 24 VDC Source Out, 24 VDC Powered	64 point (40) 24 VDC In, (24) 24 VDC Sink Out, 24 VDC Powered
Lifecycle Status	Active	Active	Active	Active
Micro Type Restrictions	Micro 20, 40, 64 Support Only	Micro 20, 40, 64 Support Only	Micro 20, 40, 64 Support Only	Micro 20, 40, 64 Support Only
Number of Discrete Inputs/Outputs	40 In / 24 Out	40 In / 24 Out	40 In / 24 Out	40 In / 24 Out
Power Voltage	24 VDC	120/240 VAC	24 VDC	24 VDC
Input Power Supply Rating	10 Watts	35 VA	10 Watts	10 Watts
24 VDC User Power for Sensors	435 mA	435 mA	435 mA	435 mA
Input Device Voltage	24 VDC	24 VDC	24 VDC	24 VDC
Output Control Voltage	Relay Out	Relay Out	24 VDC Sourced	24 VDC Sink
Relay Maximum Resistive Load Rating	2 Amps at 24 VDC and 240 VAC	2 Amps at 24 VDC and 240 VAC	N/A	N/A
Dimensions (W x H x D) mm	190 x 90 x 76	190 x 90 x 76	190 x 90 x 76	190 x 90 x 76

Analog Expansion Selection Guide

Model	Module Input Power	Input Range 0 to 10V -10V to +10V 0 to 20 mA 4 to 20 mA	Input Range RTD Pt 100	Input Range RTD Pt 100 Input Range Thermocouple Type K, J, E, S, T, B, N	Input Range millivolt ±50mV ±100mV	Output Range 0-10 VDC 0-20 mA
IC200UEX616	12 VDC	4 in / 2 out				4 in / 2 out
IC200UEX624	24 VDC	4 in				
IC200UEX626	24 VDC	4 in / 2 out				4 in / 2 out
IC200UEX636	120/240 VAC	4 in / 2 out				4 in / 2 out
IC200UEX724	24 VDC		4 in			
IC200UEX726	24 VDC		4 in / 2 out			4 in / 2 out
IC200UEX734	120/240 VAC		4 in			
IC200UEX736	120/240 VAC		4 in / 2 out			4 in / 2 out
IC200UEX824	24 VDC			4 in	4 in	
IC200UEX826	24 VDC			4 in / 2 out	4 in / 2 out	4 in / 2 out

Analog Expansion Units

The VersaMax Micro analog I/O is versatile and the Micro PLC can support up to four Analog Expansion Units, allowing you to expand up to 16 inputs and 8 outputs.



	IC200UEX624	IC200UEX616	IC200UEX626	IC200UEX636
Product Name	4 Analog I/O Channels 0 to 10 VDC, 4 to 20 mA, 24 VDC Powered	6 Analog I/O Channels (4) 0 to 10 VDC, ±10 VDC, 4 to 20 mA, 0 to 20 mA In, (2) 0 to 10 VDC, 4 to 20 mA, 0 to 20 mA Out, 12 VDC Powered	6 Analog I/O Channels (4) 0 to 10 VDC, ±10 VDC, 4 to 20 mA, 0 to 20 mA In, (2) 0 to 10 VDC, 4 to 20 mA, 0 to 20 mA Out, 24 VDC Powered	6 Analog I/O Channels (4) 0 to 10 VDC, ±10 VDC, 4 to 20 mA, 0 to 20 mA In, (2) 0 to 10 VDC, 4 to 20 mA, 0 to 20 mA Out, 120/240 VAC Powered
Lifecycle Status	Active	Active	Active	Active
Micro Type Restrictions	N/A	N/A	N/A	N/A
Number of Analog Inputs/Outputs	4 Channels In, Voltage or Current	4 Channels In / 2 Channels Out, Voltage or Current	4 Channels In / 2 Channels Out, Voltage or Current	4 Channels In / 2 Channels Out, Voltage or Current
Power Voltage	24 VDC	12 VDC	24 VDC	120/240 VAC
Input Power Supply Rating	3 Watts	2.25 Watts	3 Watts	15 VA
24 VDC User Power for Sensors	200 mA	200 mA	200 mA	200 mA
Analog Input Ranges	0-10V (10.23V Max); 0-±10V (±10.23V Max); 0-20 mA (20.47 mA Max); 4-20 mA; 12 bit resolution.	0-10V (10.23V Max); 0-±10V (±10.23V Max); 0-20 mA (20.47 mA Max); 4-20 mA; 12 bit resolution.	0-10V (10.23V Max); 0-±10V (±10.23V Max); 0-20 mA (20.47 mA Max); 4-20 mA; 12 bit resolution.	0-10V (10.23V Max); 0-±10V (±10.23V Max); 0-20 mA (20.47 mA Max); 4-20 mA; 12 bit resolution.
Analog Output Ranges	N/A	0 to 10 VDC (10.24V max.) 0 to 20 mA (20.5 mA max.) 4 to 20 mA (20.5 mA max.); 12 bit resolution.	0 to 10 VDC (10.24V max.) 0 to 20 mA (20.5 mA max.) 4 to 20 mA (20.5 mA max.); 12 bit resolution.	0 to 10 VDC (10.24V max.) 0 to 20 mA (20.5 mA max.) 4 to 20 mA (20.5 mA max.); 12 bit resolution.
Dimensions (W x H x D) mm	95 x 90 x 76	95 x 90 x 76	95 x 90 x 76	95 x 90 x 76

Analog Expansion Units

The VersaMax Micro analog I/O is versatile and the Micro PLC can support up to four Analog Expansion Units, allowing you to expand up to 16 inputs and 8 outputs.



	IC200UEX724	IC200UEX734	IC200UEX726	IC200UEX736
Product Name	4 RTD PT 100 Channels IN, 120/240 VAC Powered	4 RTD PT 100 Channels IN, 24 VDC Powered	4 RTD PT 100 Channels IN, 2 Analog Channels OUT 0 to 10 VDC, 4 to 20 mA, 0 to 20 mA Out, 24 VDC Powered	4 RTD PT 100 Channels IN, 2 Analog Channels OUT 0 to 10 VDC, 4 to 20 mA, 0 to 20 mA Out, 120/240 VAC Powered
Lifecycle Status	Active	Active	Active	Active
Micro Type Restrictions	16 bit supported on Micro 20, 40, 64 only	16 bit supported on Micro 20, 40, 64 only	16 bit supported on Micro 20, 40, 64 only	16 bit supported on Micro 20, 40, 64 only
Number of Analog Inputs/Outputs	4 Channels RTD In	4 Channels RTD In	4 Channels RTD In / 2 Channels Out, Voltage or Current	4 Channels RTD In / 2 Channels Out, Voltage or Current
Power Voltage	24 VDC	120/240 VAC	24 VDC	120/240 VAC
Input Power Supply Rating	3 Watts	15 VA	3 Watts	15 VA
24 VDC User Power for Sensors	200 mA	200 mA	200 mA	200 mA
Analog Input Ranges	2- and 3-wire types, PT 100; 16 bit	2- and 3-wire types, PT 100; 16 bit	2- and 3-wire types, PT 100; 16 bit	2- and 3-wire types, PT 100; 16 bit
Analog Output Ranges	N/A	N/A	0 to 10 VDC (10.24V max.) 0 to 20 mA (20.5 mA max.); 4 to 20 mA (20.5 mA max.); 12 bit resolution.	0 to 10 VDC (10.24V max.) 0 to 20 mA (20.5 mA max.); 4 to 20 mA (20.5 mA max.); 12 bit resolution.
Dimensions (W x H x D) mm	95 x 90 x 76	95 x 90 x 76	95 x 90 x 76	95 x 90 x 76

Analog Expansion Units

The VersaMax Micro analog I/O is versatile and the Micro PLC can support up to four Analog Expansion Units, allowing you to expand up to 16 inputs and 8 outputs.



	IC200UEX824	IC200UEX826
Product Name	4 Thermocouple or mV Input Channels, 24 VDC Powered	4 Thermocouple or mV Input Channels and 2 Analog Output Channels, 24 VDC Powered
Lifecycle Status	Active	Active
Micro Type Restrictions	16 bit supported on Micro 20, 40, 64 only	16 bit supported on Micro 20, 40, 64 only
Number of Analog Inputs/Outputs	4 Channels Thermocouple In or $\pm 50\text{mV}$ or $\pm 100\text{mV}$, 24 VDC Power Supply	4 Channels Thermocouple In or $\pm 50\text{mV}$ or $\pm 100\text{mV}$ and 2 channel analog outputs, 24 VDC Power Supply
Power Voltage	24 VDC	24 VDC
Input Power Supply Rating	3 Watts	3 Watts
24 VDC User Power for Sensors	200 mA	200 mA
Analog Input Ranges	Type K, J, E, S, T, B, N, $\pm 50\text{mV}$, $\pm 100\text{mV}$; 12 bit (16 bit 4th QTR 2009)	Type K, J, E, S, T, B, N, $\pm 50\text{mV}$, $\pm 100\text{mV}$; 12 bit (16 bit 4th QTR 2009)
Analog Output Ranges	N/A	0 to 10 VDC (10.24 V max.) 0 to 20 mA (20.5 mA max.) 4 to 20 mA (20.5 mA max.); 12 bit resolution.
Dimensions (W x H x D) mm	95 x 90 x 76	95 x 90 x 76



IC200DTX200



IC200DTX450



IC200DTX850



IC200DTX650

DataPanels Operator Interfaces

GE VersaMax DataPanels are ideal for a broad range of applications ranging from simple timer/counter/register access to full text message display with numeric keypad. All VersaMax DataPanels are preprogrammed to connect quickly to a VersaMax Micro or Nano PLC without user configuration.

	IC200DTX200	IC200DTX450	IC200DTX650	IC200DTX850
Product Name	Operator Interface for changing timer/counter/register values. 2x16 character LCD backlight display and 6 operation keys. No stored messaging, PLC stores messages. Requires IC200CBL550 cable or equivalent. Operates on 5 VDC @ 100 mA from Micro or Nano.	Operator Interface with up to 200 stored messages. 2x16 character LCD backlight display and 6 function keys. Requires IC200CBL555 or equivalent. Operates on external 24 VDC @ 40 mA.	Operator Interface with up to 200 stored messages. 4x16 character LCD backlight display and 8 function keys. Requires IC200CBL555 cable or equivalent. Operates on external 24 VDC @ 80 mA.	Operator Interface with up to 200 stored messages. 4x20 character LCD backlight display, 8 function keys and numeric keypad. Requires IC200CBL555 cable or equivalent. Operates on external 24 VDC @ 50 mA.
Lifecycle Status	Active	Active	Active	Active
Characters Per Line	16	16	16	20
Function Keys	0	6	8	8
Numeric Keypad	0	0	0	Yes
Memory Size (Number of Messages)	Messages stored in PLC	200 stored in operator interface	200 stored in operator interface	200 stored in operator interface
DataPanel Dimensions (W x H x D) mm	108 x 60 x 27	108 x 60 x 45	96 x 96 x 44	182 x 101 x 37
Number of Lines	2	2	4	4
Display Type	LCD Display with Backlight	LCD Display with Backlight	LCD Display with Backlight	LCD Display with Backlight
Operating Temperature	0°C to +50°C	0°C to +50°C	0°C to +50°C	0°C to +50°C
NEMA Rating	NEMA 4	NEMA 4	NEMA 4	NEMA 4
Programming Software	None required	DataDesigner (IC752DDZ000)	DataDesigner (IC752DDZ000)	DataDesigner (IC752DDZ000)

Micro 20, Micro 40 and Micro 64 Port 2 Communication Options

The VersaMax Micro 20, Micro 40 and Micro 64 Port 2 is modular by design and enables the user to select a wide range of communications options. The user can select RS-232, RS-485, Ethernet or USB. The RS-232 and RS-485 also come with two analog input channels (0 to 10 VDC, 10 bit). Port 2 also supports Memory Module Board that enables the user to download logic and settings without a PC.

	IC200UEM001	IC200USB001	IC200USB002	IC200UUB001
Product Name	Ethernet module	RS-232 option board with (2) 0-10 VDC analog in	RS-485 option board with (2) 0-10 VDC analog in	USB option board (no analog option)
Lifecycle Status	Active	Active	Active	Active
Micro Type Restrictions	Micro 20, 40, 64 Support Only	Micro 20, 40, 64 Support Only	Micro 20, 40, 64 Support Only	Micro 20, 40, 64 Support Only
Connection Type	10/100Mbps port supporting RJ45 connection	RS-232 (RJ-45)	RS-485 (RJ-45)	USB (Slave Only) version 2.0, Straight B type
Protocol Supported	SRTP and Modbus TCP (server)	SNP, SNP Master, SNP X, Modbus Master, Modbus Slave, Serial Read and Write	SNP, SNP Master, SNP X, Modbus Master, Modbus Slave, Serial Read and Write	SNP, SNP X, Modbus Slave, Serial Read
Analog Support on Communications Module	No Analog Support	Two Analog Inputs. 0 to 10 VDC (10 bits)	Two Analog Inputs. 0 to 10 VDC (10 bits)	No Analog Support
Memory Module Board Support	Yes	Yes	Yes	Yes
Programming Support	Yes, SRTP only	Yes	Yes	Yes
Programming Software	Machine Edition Logic Developer 5.0, Service Pack 3, Hotfix	Machine Edition Logic Developer 5.0, Service Pack 3, Hotfix	Machine Edition Logic Developer 5.0, Service Pack 3, Hotfix	Machine Edition Logic Developer 5.0, Service Pack 3, Hotfix



Ethernet Communication Option

The VersaMax SE enables the VersaMax Micro and Nano to easily be connected to an Ethernet LAN via the VersaMax SE. The user can easily download, upload and monitor VersaMax Micro and Nano controllers.

IC200SET001

Product Name	Ethernet to Serial Network Module
Lifecycle Status	Active
Ethernet Port	10/100Mbps port supporting RJ45 connection
Serial Port	One RS-232 and one RS-485 port (up to 16 devices supported)
Communications Configurations	Communication configurations include Ethernet SRTP to SNP or Modbus TCP to Modbus Slave
Power Voltage	12/24 VDC
Dimensions (W x H x D) mm	36 x 90 x 60
Programming Software	VersaPro 2.0 or greater, Machine Edition Logic Developer
Mounting	35 mm DIN-rail or Panel Mount
Power Supply Voltage Range	12/24 VDC

Portable Program Download Device (PPDD)

The Portable Program Download Device enables the user to easily upload and download VersaMax Micro 23/28 configuration and logic from/to a USB Memory Stick. Portable Program Download Device (PPDD) will support commercial memory stick devices using USB connection. The purpose of the PPDD is to allow users to store and download their logic applications and configuration to GE VersaMax Micro 23/28 PLCs without the need of a PC. The PPDD plugs into the 15 pin RS-485 port on the VersaMax Micro 23/28 CPU base power supply. The RS-485 port provides the power for the PPDD. VersaMax Micro 23/28 logic and configuration files can be zipped and easily emailed to remote locations for VersaMax Micro 23/28 downloads.



There are many advantages of the PPDD such as:

- No PC required to backup applications or download applications
- No expensive travel to perform field upgrades, just email the file to the remote location
- Compatible with commercial off the shelf USB Memory Sticks
- The PPDD can be panel mounted, DIN-rail mounted or hand held
- Supports diagnostics to ensure that the CPU is compatible with the application
- OEM Password Protection supported
- Simple to operate, LEDs to show activity, error and status. Push button to start download and selector switch for direction of download, to the PLC or to the memory stick.
- Designed for the industrial environment UL and CE (not Class 1 Div 2 approved)

PPDD features:

- Slide switch for direction of data storage
- Status and Diagnostic LEDs


LEDs Status

	Error (Red)	Status (Green)
LED On Steady	On when there isn't a Memory Stick attached	On after button has been pushed and name in PLC matches and when download is complete
LED Flashing	Flashing when CPU doesn't match or Memory Stick doesn't have the proper file\	Slow Flash During Download
Fast Flash (500msec on 500msec off)	Flashing if Verify fails	Fast Flash when CPU type matches but name in PLC doesn't match
Slow Flash (1 sec on 1 sec off)		
LED Off	Off during normal conditions with no errors	Off prior to button being pushed for download

The Portable Program Download Device is simple to use. The example below demonstrates the four easy steps of downloading an application and emailing it to a remote location for application upgrade.

Step 1.
 Slide PPDD selector toward USB memory stick.
 Press PPDD download button. The PPDD will store/verify the VersaMax Micro application and configuration onto the USB memory stick.

Step 4.
 Place the USB memory stick in the PPDD, slide selector toward controller.
 Press PPDD download button. The PPDD will stop the CPU and download/verify file. The CPU can be placed in the Run mode via the key switch or cycling power.

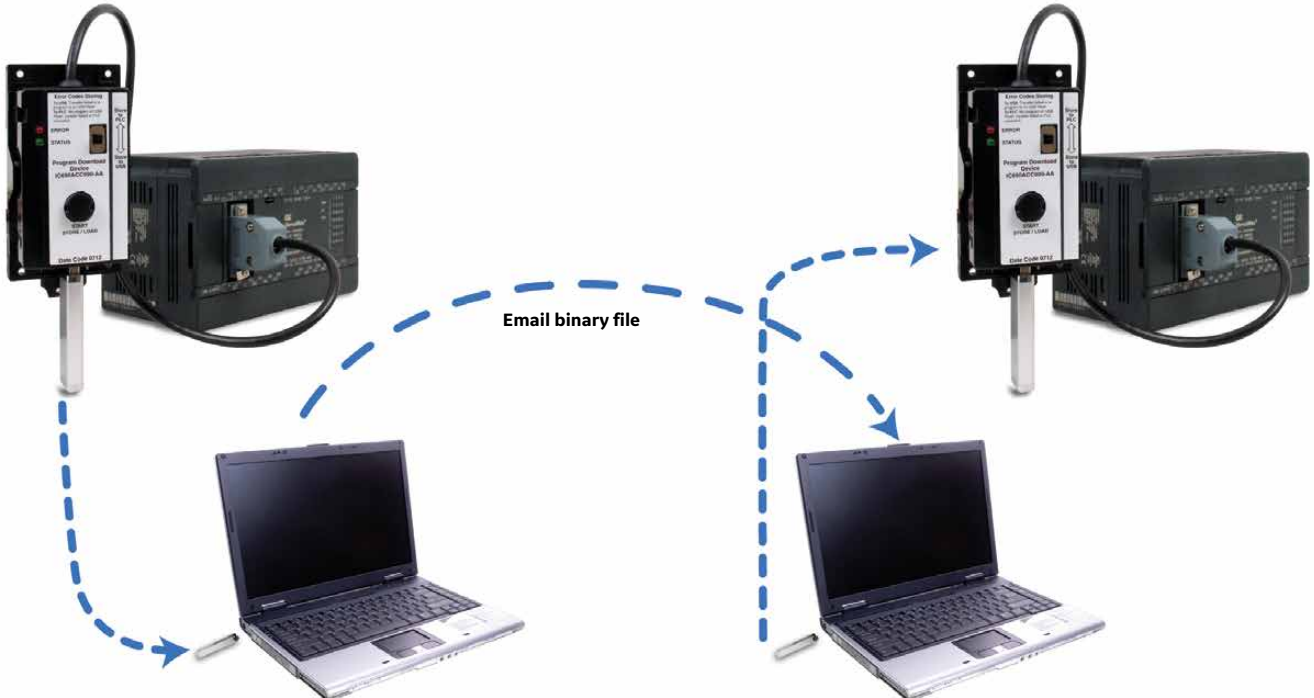

Step 2.
 Remove the memory stick from the PPDD and connect it to your PC. Copy the binary file from the memory stick to your PC and email to remote location.

Step 3.
 Remote location takes the binary file that is in the email and stores it on a USB memory stick.

Portable Program Download Device

Part Number	Description
IC690ACC990	Portable Program Download Device. Supports standard USB memory devices to store and load VersaMax Micro 23/28 PLC applications without the need of a PC.

Accessories

Part Number	Description	Lifecycle Status
IC200ACC402	Spare Removable Terminal Strips, 10 per pack. (Micro 14, Micro 23 and Micro 28 and all expansion units)	Active
IC200ACC403	Battery for Micro 23 and Micro 28 for data retention (5.2 months minimum @ 70°C and 32.4 months minimum @ 20°C)	Active
IC200ACC404	Spare parts kit. Two terminal strips and four plastic doors and four covers for Micro 14, Micro 23 and Micro 28.	Active
IC200ACC414	Long Term Battery for Micro 23, Micro 28 and Micro 64 (19 months minimum @ 70°C and 121 months minimum @ 20°C)	Active
IC200ACC415	RS-232 to RS-485 Converter requires IC200CBL500 or equivalent.	Active
IC200ACC451	Simulator for VersaMax Micro 14, Micro 23 and Micro 28. (8 Inputs)	Active
IC200UMB001	Flash Memory Board for program download and compatible with Micro 64 (128Kbytes)	Active

External Power Supplies

Part Number	Description	Lifecycle Status
IC690PWR024	24 VDC, 5 Amp Output Power and 120/230 VAC Input Power Power Supply	Active
IC690PWR124	24 VDC, 10 Amp Output Power and 120/230 VAC Input Power Power Supply	Active

Programming and Trouble Shooting Tools

Part Number	Description	Lifecycle Status
IC646MPM101	Proficy Logic Developer - PLC Nano/Micro, Programming Cable (No Upgrades included)	Active
IC752DDZ000	VersaMax DP Operator Interface DataDesigner editor	Active

Cables

(0.1 meter cable, IC200CBL501, is included in every expansion base package)

Part Number	Description	Lifecycle Status
IC200CBL500	Programming cable (RJ-45 to DB-9 pin) RS-232. 3 Meters.	Active
IC200CBL501	I/O Expansion cable, 0.1 meter long (Qty 5)	Active
IC200CBL505	I/O Expansion cable, 0.5 meter long	Active
IC200CBL510	I/O Expansion cable, 1 meter long	Active

Starter Kits

Part Number	Description	Lifecycle Status
IC200TBX010	Tool box, Nano 10 and software. Includes (IC200NDR001) 24 VDC In/Relay Out, 24 VDC powered (requires an external 24 VDC Supply) with software, manuals and cables (IC646MPH101)	Active
IC200TBX110	Tool box, Nano 10, operator interface and software. Includes (IC200NDR001) 24 VDC In/Relay Out, 24 VDC powered (requires an external 24 VDC Supply), VersaMax DataPanel DP45 with programming software and cables, (IC640VPS00, IC752DDZ000, IC200CBL555)	Active
IC200TBX210	Tool box, Nano 10, Ethernet interface and software. Includes (IC200NDR001) 24 VDC In/Relay Out, 24 VDC powered (requires an external 24 VDC Supply), VersaMax SE (IC200SET001) with all software, cables (IC646MPH101) and manuals.	Active
IC200TBX014	Tool box, Micro 14 and software. Includes (IC200UDR001) 24 VDC In/Relay Out, AC Power Supply with software, manuals and cables (IC646MPH101)	Active
IC200TBX114	Tool box, Micro 14, operator interface and software. Includes (IC200UDR001) 24 VDC In/Relay Out, AC Power Supply, VersaMax DataPanel DP45 with programming software and cables, (IC640VPS00, IC752DDZ000, IC200CBL555)	Active
IC200TBX214	Tool box, Micro 14, Ethernet interface and software. Includes (IC200UDR001) 24 VDC In/Relay Out, requires 120 VAC power, VersaMax SE (IC200SET001) with all software, cables (IC646MPH101) and manuals.	Active
IC200TBX023	Tool box, Micro 23 and software. Includes (IC200UAL006) DC In/Relay Out, 2 analog In, 1 analog out, AC Power Supply with software, manuals and cables (IC646MPH101)	Active
IC200TBX123	Tool box, Micro 23, operator interface and software. Includes (IC200UAL006) 24 VDC In/Relay Out, 2 Analog In/1 Analog out, AC P/S, VersaMax DataPanel DP45 with programming software and cables, (IC640VPS00, IC752DDZ000, IC200CBL555)	Active
IC200TBX223	Tool box, Micro 23, Ethernet interface and software. Includes (IC200UAL006) 24 VDC In/Relay Out, requires 120 VAC Power, VersaMax SE (IC200SET001) with all software, cables (IC646MPH101) and manuals.	Active
IC200TBX028	Tool box, Micro 28 and software. Includes (IC200UDR005) 24 VDC In/Relay Out, AC Power Supply with software, manuals and cables (IC646MPH101)	Active
IC200TBX128	Tool box, Micro 28, operator interface and software. Includes (IC200UDR005) 24 VDC In/Relay Out, AC P/S, VersaMax DataPanel DP45 with programming software and cables, (IC640VPS00, IC752DDZ000, IC200CBL555)	Active
IC200TBX228	Tool box, Micro 28, Ethernet interface and software. Includes (IC200UDR005) 24 VDC In/Relay Out, requires 120 VAC Power, VersaMax SE (IC200SET001) with all software, cables (IC646MPH101) and manuals.	Active
IC200TBX020	Tool box, Micro 20 and software. Includes (IC200UDD020) 24VDC In/24VDC Out, DC Power Supply, (IC200USB001) RS-232 option board with (2) 0 -10VDC analog in with software, manuals and cables (IC646MPPM101)	Active
IC200TBX120	Tool box, Micro 20 and software. Includes (IC200UDR120) 24VDC In/Relay Out, AC Power Supply, (IC200USB001) RS-232 option board with (2) 0 -10VDC analog in with software, manuals and cables (IC646MPPM101)	Active
IC200TBX220	Tool box, Micro 20, operator interface and software. Includes (IC200UDD020) 24VDC In/24VDC Out, DC Power Supply, (IC200USB001) RS-232 option board with (2) 0 -10VDC analog in with VersaMax DataPanel DP45 with programming software and cables, (IC646MPPM101, IC752DDZ000, IC200CBL555)	Active
IC200TBX320	Tool box, Micro 20, operator interface and software. Includes (IC200UDR120) 24VDC In/Relay Out, AC Power Supply, (IC200USB001) RS-232 option board with (2) 0 -10VDC analog in with VersaMax DataPanel DP45 with Logic Developer programming software and cables, (IC646MPPM101, IC752DDZ000, IC200CBL555)	Active
IC200TBX520	Tool box, Micro 20, QuickPanel color touch screen and software. Includes (IC200UDR164) 24VDC In/Relay Out, AC Power Supply, (IC200UEM001) Ethernet option board, QuickPanel Display (IC754VSI06STD) with software, manuals and cables (BC646MBL001)	Active
IC200TBX040	Tool box, Micro 40 and software. Includes (IC200UDD040) 24VDC In/24VDC Out, DC Power Supply, (IC200USB001) RS-232 option board with (2) 0 -10VDC analog in with software, manuals and cables (IC646MPPM101)	Active
IC200TBX140	Tool box, Micro 40 and software. Includes (IC200UDR140) 24VDC In/Relay Out, AC Power Supply, (IC200USB001) RS-232 option board with (2) 0 -10VDC analog in with software, manuals and cables (IC646MPPM101)	Active
IC200TBX240	Tool box, Micro 40, operator interface and software. Includes (IC200UDD040) 24VDC In/24VDC Out, DC Power Supply, (IC200USB001) RS-232 option board with (2) 0 -10VDC analog in with VersaMax DataPanel DP45 with programming software and cables, (IC646MPPM101, IC752DDZ000, IC200CBL555)	Active
IC200TBX340	Tool box, Micro 40, operator interface and software. Includes (IC200UDR140) 24VDC In/Relay Out, AC Power Supply, (IC200USB001) RS-232 option board with (2) 0 -10VDC analog in with VersaMax DataPanel DP45 with Logic Developer programming software and cables, (IC646MPPM101, IC752DDZ000, IC200CBL555)	Active
IC200TBX540	Tool box, Micro 40, QuickPanel color touch screen and software. Includes (IC200UDR140) 24VDC In/Relay Out, AC Power Supply, (IC200UEM001) Ethernet option board, QuickPanel Display (IC754VSI06STD) with software, manuals and cables (BC646MBL001)	Active
IC200TBX064	Tool box, Micro 64 and software. Includes (IC200UDD064) 24 VDC In/24 VDC Out, DC Power Supply, (IC200USB001) RS-232 option board with (2) 0 -10 VDC analog in with software, manuals and cables (IC646MPPM101)	Active
IC200TBX164	Tool box, Micro 64 and software. Includes (IC200UDR164) 24 VDC In/Relay Out, AC Power Supply, (IC200USB001) RS-232 option board with (2) 0 -10 VDC analog in with software, manuals and cables (IC646MPPM101)	Active
IC200TBX264	Tool box, Micro 64, operator interface and software. Includes (IC200UDD064) 24 VDC In/24 VDC Out, DC Power Supply, (IC200USB001) RS-232 option board with (2) 0 -10 VDC analog in with VersaMax DataPanel DP45 with programming software and cables, (IC646MPPM101, IC752DDZ000, IC200CBL555)	Active
IC200TBX364	Tool box, Micro 64, operator interface and software. Includes (IC200UDR164) 24 VDC In/Relay Out, AC Power Supply, (IC200USB001) RS-232 option board with (2) 0 -10 VDC analog in with VersaMax DataPanel DP45 with Logic Developer programming software and cables, (IC646MPPM101, IC752DDZ000, IC200CBL555)	Active
IC200TBX564	Tool box, Micro 64, QuickPanel color touch screen and software. Includes (IC200UDR164) 24 VDC In/Relay Out, AC Power Supply, (IC200UEM001) Ethernet option board, QuickPanel Display (IC754VSI06STD) with software, manuals and cables (BC646MBL001)	Active

Configuration Guidelines

Examples of Typical Application

Configuration for Nano 10 (Applications needing less than 6 (24 VDC) inputs and 4 relay outputs)

Qty	Part Number	Description
1	IC200NDR001	10 point (6) 24 VDC In, (4) Relay Out, 24 VDC Powered
1	BC646MPPM101	Proficy Logic Developer - PLC Nano/Micro, Programming Cable included and GlobalCare Complete (Upgrades included for 15 months of upgrades)

Options to consider

1	IC200ACC450	Simulator for VersaMax Nano 10. (6 Inputs)
1	IC690PWR024	24 VDC, 5 Amp Output Power and 120/230 VAC Input Power Power Supply

Configuration for Micro 14 (Example Application needing 12 (24 VDC) discrete inputs, 6 relay outputs and 3 Analog inputs with 24 VDC power)

Qty	Part Number	Description
1	IC200UDR002	14 point (8) 24 VDC In, (6) Relay Out, 24 VDC Powered
1	IC200UEI008	8 point 24 VDC In, 24 VDC Powered
1	IC200UEX626	6 Analog I/O Channels (4) 0 to 10 VDC, ± 10 VDC, 4 to 20 mA, 0 to 20 mA In, (2) 0 to 10 VDC, 4 to 20 mA, 0 to 20 mA Out, 24 VDC Powered
1	BC646MPPM101	Proficy Logic Developer - PLC Nano/Micro, Programming Cable included and GlobalCare Complete (Upgrades included for 15 months of upgrades)

Options to consider

1	IC200UDR010	28 point (16) 24 VDC In, (12) Relay Out, 24 VDC Powered - advantage is two serial ports, Real Time clock and more data memory.
1	IC200ACC451	Simulator for VersaMax Micro 14, Micro 23 and Micro 28. (8 Inputs)
1	IC690PWR024	24 VDC, 5 Amp Output Power and 120/230 VAC Input Power Power Supply
1	IC200DTX650	Operator Interface with up to 200 stored messages. 4x16 character LCD backlight display and 8 function keys. Requires IC200CBL550 cable or equivalent. Operates on external 24 VDC @ 80 mA.

Configuration for Micro 28 (Example Application needing 22 (24 VDC) discrete inputs, 16 outputs [Ten Relay and Six 24 VDC], 2 RTD inputs, 1 Analog output using AC power. Also requires Display with keypad)

Qty	Part Number	Description
1	IC200UDR005	28 point; (16) 24 VDC In, (11) Relay Out, (1) 24 VDC Out, 120/240 VAC Powered.
1	IC200ACC403	Battery for Micro 23 and Micro 28 for data retention
1	IC200UEX014	14 point (8) 24 VDC In, (6) 24 VDC Out, 24 VDC Powered
1	IC200UEX736	4 RTD PT 100 Channels IN, 2 Analog Channels OUT 0 to 10 VDC, 4 to 20 mA, 0 to 20 mA Out, 120/240 VAC Powered
1	BC646MPPM101	Proficy Logic Developer - PLC Nano/Micro, Programming Cable included and GlobalCare Complete (Upgrades included for 15 months of upgrades)
1	IC200DTX850	Operator Interface with up to 200 stored messages. 4x20 character LCD backlight display, 8 function keys and numeric keypad. Requires IC200CBL550 cable or equivalent. Operates on external 24 VDC @ 50 mA.
1	IC752DDZ000	VersaMax DP Operator Interface DataDesigner editor

Options to consider

1	IC200ACC451	Simulator for VersaMax Micro 14, Micro 23 and Micro 28. (8 Inputs)
1	IC690PWR024	24 VDC, 5 Amp Output Power and 120/230 VAC Input Power Power Supply

Configuration for Micro 644 (Example Application needing 45 (24 VDC) discrete inputs, 32 outputs (Twelve Relay and Twenty 24 VDC), 2 Servo motors.
Application also requires Color Touch Graphic Display

Qty	Part Number	Description
1	IC200UDD064	Micro 64; (40) 24 VDC In, (24) 24 VDC Source Out 0.7 amps with ESCP protection, 24 VDC Power Supply.
1	IC200ACC414	Long Term Battery for Micro 23, Micro 28 and Micro 64
1	IC200UEX211	28 point (16) 24 VDC In, (12) Relay Out, 120/240 VAC Power Supply
1	IC200UEM001	Ethernet Module
1	IC200UMM002	2 Axis Motion Module
1	IC800VMM10LBKSE25	VersaMotion 1000 Watt Motor with brake
1	IC800VMA102	Servo Amplifier, 1000 Watts, 220 VAC
1	IC800VMCB1030	Brake and Power Cable for 1000 Watt Servo Motor and brake, 3 meters
1	IC800VMCE1030	Encoder Cable for 1000 Watt and greater, 3 meters
1	IC800VTBC005	I/O terminal block and cable .5 meters
1	IC800VMCS030	Communications cable and servo driver to PC, 3 meters
1	IC754VSI06STD	QuickPanel View Intermediate 6 inch STN Touch
1	BC646MBL001	Machine Edition Lite Development Suite with Proficy GlobalCare Complete. Includes View Development for QuickPanel and LD-PLC Nano/Micro with 15 months of Proficy GlobalCare which is renewable on an annual basis.
1	IC200CBL500	Programming cable (RJ-45 to DB-9 pin) RS-232. 3 Meters.
Options to consider		
1	IC200UMB001	Flash Memory Board for program download and compatible with Micro 64 (128Kbytes)
1	IC690PWR124	24 VDC, 10 Amp Output Power and 120/230 VAC Input Power Power Supply